

BELT DRESSING



SP™ 607



NSF® Rating: P1 Rated (Miscellaneous)
(Registration # 115092)



Asphalt & Rosin Free



Features Spray Anyway™ nozzle



HMIS Hazard Rating:
Health (2) • Flammability (4) • Reactivity (0)

- Increases pulling power
- Contains no asphalt or rosin
- Does not glaze or collect dirt



PRESERVE. PROTECT. PREVENT.™

Sprayon® SP™607 Belt Dressing has a proven record of effective performance, even when subjected to wet or outdoor conditions. Will not glaze, collect dirt or dust. This formulation conditions belts while increasing pulling power up to 50%. Equipped with a Spray Anyway™ Valve which allows treatment to bottom surface of flat belts while the belt is running, or directly to sheaves of “V” belts. Reduces squeaky noise caused by old “V” belts.

SPECIALTY PRODUCTS

USES

- Rubber
- Flat-round-or "V" belts
- Leather
- Auto fan belts
- Canvas
- Farm machinery
- Fabric
- Compressors/pumps
- Plastic
- Generators/fans

APPLICATION

Use in a well ventilated area. Shake can for 1 minute. Hold container upright 8-10" from belt surface. Application may be made while belt is running. Do not apply in continuous spray. Apply several light coats. For best results, use at room temperature (70°F-90°F). Occasional repeat applications will maintain efficiency. **NOTE:** Avoid excessive build-up.

PERFORMANCE

- NSF Registration Number 115092; P1 Rated
- Increases Pulling power up to 50%
- Equipped with Spray Anyway™ Valve
- Weather proof
- **DRYING TIME @ 70°F @ 50% R.H.**
TO TOUCH: 10-15 minutes
RECOAT: Anytime

PROPERTIES

BASE TYPE: Non-Chlorinated
APPEARANCE: Amber
PROPELLANT: Hydrocarbon
% ACTIVES: 33.00%
WT./GAL.: 5.98
SPECIFIC GRAVITY: 0.72
%VOC: 55.30%
V.O.C. COMPLIANT CALIFORNIA: Yes
V.O.C. COMPLIANT OTC STATES: Yes
FLAMMABLE: Yes
FLASH POINT: < 0 °F
HAZARD CODE: 2,4,0
SHELF LIFE: 3 years from date of manufacture

PACKAGING

STOCK #: S00607
UPC CODE: 0-75577-90607-9
FILL WT.: 11 oz.
PER CASE: 12
CARTON DIMENSIONS:
L 11.13" x W 8.44" x H 8.38"

RESOURCES


MSDS/EDS/PRODUCT DATA SHEETS: sprayon.com
CUSTOMER SERVICE:
1-800-777-2966
TECHNICAL INFORMATION:
1-800-251-2486

SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.



SP607

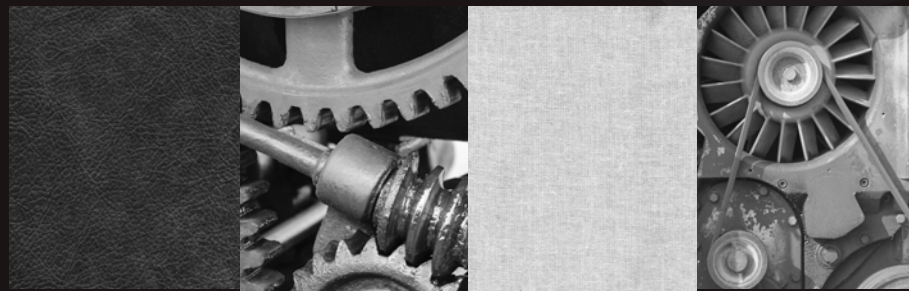

© 2010 Sprayon® Products Made in U.S.A.

Distributed by:

PRESERVE. PROTECT. PREVENT.



Sprayon® Products
101 Prospect Ave. NW
Cleveland, OH 44115
Sprayon.com
1-800-777-2966

310-PDS-SP607